



Swedstyle MotionTi





Hand controller for inlay mounting, with large buttons for effective control of height-adjustable desk frames.

The Inlay Touch hand controller provides simple and effective up and down movement control. Its inlay design gives a low-profile appearance with large, comfortable touch buttons, as well as furnishing optimal system control. Easily fitted and easy to mount.

- Compact recessed model
- Modern design
- Up/Down function
- Great button feel
- Touch buttons



PRODUCT	ART. NO	COLOUR
Motion Ti	HAND10	Black

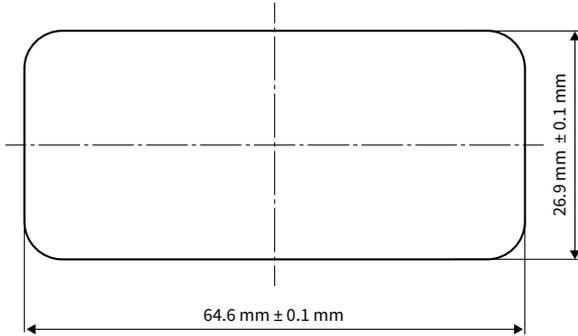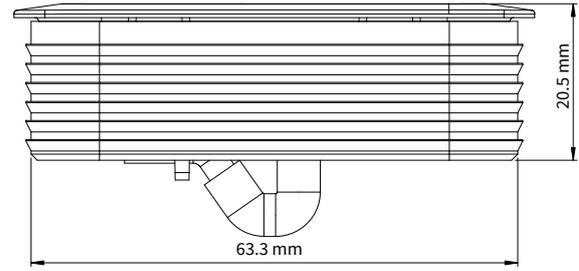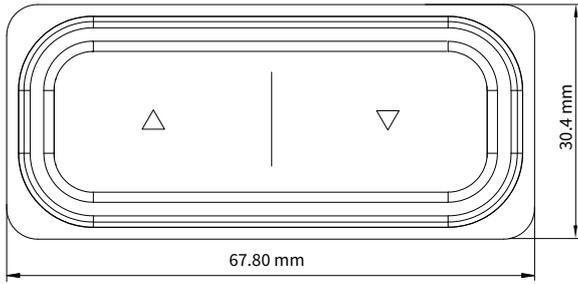

Technical specifications

Supply voltage	5 VDC ± 10%
Current Consumption (average)	<1 mA
Service life	10 000 cycles
Cable length	1 800 mm (± 50 mm)
Dimensions (L x W x H)	30.4 × 67.8 × 20.5 mm
Dimensions (milled cut-out)	26.9 × 64.6 mm ± 0.1 mm
Weight (including cable)	70 g
Ambient conditions during operation	+5 °C to +40 °C at max. 68% relative air humidity (non-condensing), up to an altitude of 2,000 m.
Ambient conditions during transport and storage	-25 °C to +40 °C at max. 68% relative air humidity (non-condensing). +40 °C to 60 °C at max. 32% relative air humidity (non-condensing). Temperatures of more than 40 °C for periods not exceeding 10h. Product must be acclimatised to acceptable operating conditions before assembly.
Compatibility	All Swedstyle electric height-adjustable frames
Degree of protection (IEC 60529)	IP 20
Standards and regulations	EMC directive 2014/30/EU RoHS directive 2011/65/EU