




## CLASSIC TWIN 2.0 FLEX-2022

*New generation CLASSIC TWIN desk frame. Sit & Stand frame with electric motors for two work stations with straight desktops placed centrally next to each other. Stable design with continuous height adjustment control for ergonomic working positions.*

- Ergonomic with flexible height
- For two work stations

CLASSIC Twin straight electric Sit & Stand frame, with continuous height adjustment control, makes it easy for the user to create an ergonomic work environment. Robust and flexible design that can be adjusted lengthways ensures a reliable desk that is easily adapted to the desktop of your choice. Free-standing legs mean optimum freedom of movement thanks to unrestricted leg room. Based on the latest technology in height adjustment control to ensure reliable and comfortable operation.

| Art. no       | Colour | Stand sections |
|---------------|--------|----------------|
| C4X113111A08X | Silver | 3D             |
| C4X113111A40X | Black  | 3D             |
| C4X113111A25X | White  | 3D             |

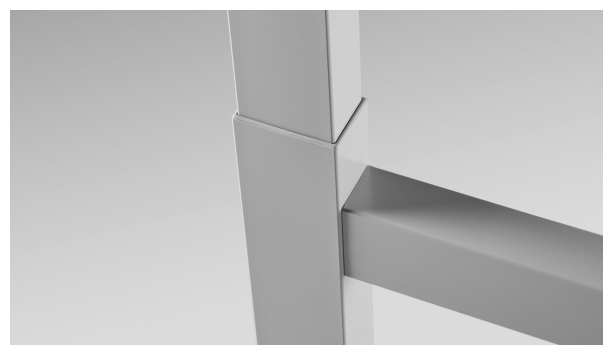

# Technical specifications

## CLASSIC TWIN 2.0 FLEX-

### 2022



| Specification                     | Value  |
|-----------------------------------|--|
| Adjustable height                 | Yes  |
| Powered by                        | Electricity  |
| Frame width                       | 1150 - 1740 mm   |
| Stroke                            | 660 mm (590 - 1250 mm $\pm$ 5 mm)  |
| Lift capacity                     | Max 100 kg x2  |
| Speed                             | 40 mm/sec  |
| Standby power                     | 0,1 W  |
| Noise level                       | < 42 dBa   |
| Dimensions tabletops              | 1160 - 2200 mm x 600 - 900 mm  |
| Certifications                    | Fulfill Machine directive 2006/42/EC<br>EMC directive 2014/30/EU<br>Low voltage directive 2014/35/EC<br>REACH, WEEE and RoHS 3 2015/863<br>EN 527-1:2011 Type A, EN 527-2:2016<br>ISO 21016<br>UL 962 ETL listed |
| Duty cycle                        | 10%, 1 min/9 min pause. Max 2 min/18 min   |
| Installation height down position | 615 mm   |
| Max bending torque column         | Max 200 Nm   |
| Paintwork                         | Powder coating   |
| Area of use                       | Indoor environment   |
| Control unit performance          | Low inbuilt height dimensions<br>Switching technology without any magnetic fields<br>Inbuilt overload protection<br>Inbuilt temperature protection   |
| Lifetime                          | Min 10 000 cycles  |
| Ambient temperature               | Ambient temperature: +5° to +30° C   |
| Humidity non condensed            | Humidity: 5 - 85% non condensed  |